

Sensing Specifications


Flush Mountable	Shielded sensors only
Repeat Error (% of Sn)	<2%
Hysteresis (% of SN)	2-20% (5% is typical)

Mechanical Specifications

Dimensions	As needed!
DC Cable Versions	As needed!
Enclosure Rating	As needed!
Operating Temperature Range	0° to 60°C
Signal Indicator	None

Electrical Specifications

TTL Compatible	Yes
Current Consumption	<
Maximum Switching Frequency	100 Hz
Transient Protection	N
Short Circuit Protection	N
Reverse Polarity Protection	Y

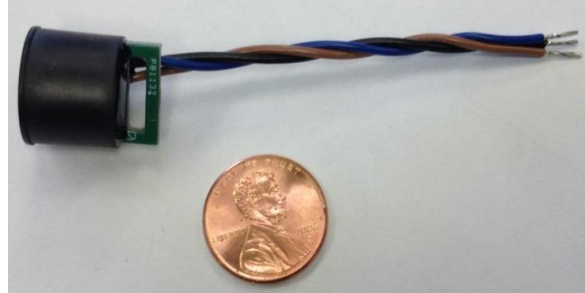

Example Housing

Custom housings can be 3D printed overnight!

Price starting at \$10!

Available only to OEM customers (500 piece minimum order QTY). The idea is to provide a snap-in solution requiring minimal installation, no adjustment and rugged dependability! Give us a call (+775) 826-2003.